



09/29/00

NEW UNITED STATES UTILITY PATENT APPLICATION

under 37 C.F.R. 1.53(b)

A

Page 1

Atty. Docket No. 03797.00006

Assistant Commissioner of Patents
Box Patent Applications
Washington, D.C. 20231



Enclosed herewith is a new patent application and the following papers:

First Named Inventor (or application identifier): Jonathan C. Kagle et al.

Title of Invention: METHOD AND APPARATUS FOR REDUCING IMAGE ACQUISITION
TIME IN A DIGITAL IMAGING DEVICE

1. ☒ Specification 18 pages (including specification, claims, abstract) / 27 claims (3 independent)
2. ☒ Declaration/Power of Attorney is:
 - ☒ attached in the regular manner.
 - ☐ NOT included, but deferred under 37 C.F.R. § 1.53(f).
3. ☒ 6 Distinct sheets of ☐ Formal ☒ Informal Drawings
4. ☐ Preliminary Amendment.
5. ☐ Information Disclosure Statement
 - ☐ Form 1449
 - ☐ A copy of each cited prior art reference
6. ☒ Assignment with Cover Sheet.
7. ☐ Priority is hereby claimed under 35 U.S.C. § 119 based upon the following application(s):

Country	Application Number	Date of Filing (day, month, year)

8. ☐ Priority document(s).
9. ☐ Statement Claiming Small Entity Status.
10. ☐ Microfiche Computer Program (Appendix).
11. ☐ Nucleotide and/or Amino Acid Sequence Submission.
 - ☐ Computer Readable Copy.
 - ☐ Paper Copy (identical to computer copy).
 - ☐ Statement verifying identity of above copies.

009260"05422960

NEW UNITED STATES UTILITY PATENT APPLICATION
under 37 C.F.R. 1.53(b)

Page 2

Atty. Docket No. 03797.00006

12. Calculation of Fees:

FEES FOR	EXCESS CLAIMS	FEE	AMOUNT DUE
Basic Filing Fee (37 C.F.R. § 1.16(a))			\$690.00
Total Claims in Excess of 20 (37 C.F.R. § 1.16(c))	7	18.00	\$126.00
Independent Claims in Excess of 3 (37 C.F.R. § 1.16(b))	0	78.00	\$0.00
Multiple Dependent Claims (37 C.F.R. § 1.16(d))	0	260.00	\$0.00
Subtotal - Filing Fee Due			\$816.00
	REDUCE BY (%) (\$)		
Reduction by 50%, if Small Entity (37 C.F.R. §§ 1.9, 1.27, 1.28)	0		\$0.00
TOTAL FILING FEE DUE			\$816.00
Assignment Recordation Fee (if applicable) (37 C.F.R. § 1.21(h))	1	40.00	\$40.00
GRAND TOTAL DUE			\$856.00

13. PAYMENT is:

- ☒ included in the amount of the GRAND TOTAL by our enclosed check. A general authorization under 37 C.F.R. § 1.25(b), second sentence, is hereby given to credit or debit our Deposit Account No. 19-0733 for the instant filing and for any other fees during the pendency of this application under 37 C.F.R. §§ 1.16, 1.17 and 1.18.
- ☐ not included, but deferred under 37 C.F.R. § 1.53(f).

14. All correspondence for the attached application should be directed to:

Banner & Witcoff, Ltd.
1001 G Street, N.W.
Washington, D. C. 20001-4597
Telephone: (202) 508-9100
Facsimile: (202) 508-9299

15. Other: _____

Date: September 29, 2000

By: Marie-Claire B. Maple
Marie-Claire B. Maple
Reg. No. 37,588

PIB/MCM/dah

METHOD AND APPARATUS FOR REDUCING IMAGE ACQUISITION TIME IN A DIGITAL IMAGING DEVICE

TECHNICAL FIELD

The present invention relates to digital image processing. More particularly, the present invention is directed to a method and apparatus for reducing the time required to process and store an image on a storage medium in a digital imaging device.

BACKGROUND OF THE INVENTION

In today's digital world, digital imaging devices, such as digital cameras, are enjoying great success. While digital imaging devices may provide superior image quality and versatility to the user, the rate with which an image is acquired in these devices is often slow. This is usually due to image processing operations performed by the device prior to storing the image on a storage medium.

More particularly, in digital imaging devices, an image is captured by an image sensor and the raw image data is supplied to a central processing unit (CPU) for processing. The processing usually includes conventional image processing and compression of the image data. The processed image data is then stored onto a storage medium. A significant period of time is often required to perform the image processing. More particularly, each part of the image processing pipeline is usually performed sequentially on the entire image. The processed image data is then stored onto a storage medium. Writing the image data for the entire image is also a time-consuming process, often much greater than the image processing. In addition, many digital imaging devices are unusable during the time from when the image is obtained by an image sensor until it is stored on the storage medium. Therefore, digital imaging devices do not efficiently support the rapid capture of a series of images.

In an effort to address this problem, digital imaging devices have been developed that delay image processing until some time after the raw image data has been stored. More particularly, these devices include a storage medium that is usually large enough to store the raw data for up to 10 images. The raw image data is stored on the storage medium, and the CPU processes the raw data at a later time. However, this approach continues to suffer from the disadvantage of limited ability to support the rapid capture of a series of images, and suffers from the additional disadvantage of requiring a large amount of memory.

Other devices buffer images that have already been processed, which also requires a large amount of memory. In addition, this technique suffers from the problem of risking picture loss as the imaging device reports "ready" before the image has been completely written to the permanent storage device.

Therefore, there is a need for a method and apparatus that provides for decreased image acquisition time in digital imaging devices. More particularly, there is a need for a method and apparatus that enables a digital imaging device to capture multiple images rapidly by decreasing the time period between capturing a first image and being prepared to capture another image.

SUMMARY OF THE INVENTION

The deficiencies and limitations of the prior art are overcome by the present invention, which provides a method and apparatus for decreasing the image acquisition time in digital imaging devices. More particularly, according to the present invention, the image acquisition time is reduced by processing segments of an entire image and storing the processed image segments onto the storage medium.

According to another aspect of the present invention, at least a portion of the image processing pipeline may be divided into a plurality of pipeline stages to provide parallel processing of the image segments.

According to yet another aspect of the invention, stitching may be performed on the processed image segments stored onto the storage medium to restore the entire image.

These and other objects and features of the present invention will be apparent upon consideration of the following detailed description of preferred embodiments thereof, presented in connection with the following drawings in which like reference numerals identify like elements throughout.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 shows the basic elements of a digital imaging device according to the present invention;

Fig. 2 shows another arrangement of the basic elements of the digital imaging device according to the present invention;

Figs. 3A and 3B respectively show an original image and image segments of the original image;

Fig. 4 shows an example of image processing operations performed on the image segments shown in Fig. 3B;

Fig. 5 shows an example of an image processing pipeline according to an aspect of the present invention;

Fig. 6 shows an example of an image processing pipeline according to another aspect of the present invention; and

Fig. 7 shows another arrangement of the basic elements of the digital imaging device according to the present invention.

DETAILED DESCRIPTION OF THE INVENTION

Referring to Fig. 1, the basic elements of a digital imaging device 100 include a lens 8 and an image sensor 10 for obtaining an image and a central processing unit (CPU) 12 for processing the image data supplied from the image sensor 10. The image sensor 10 may be a CCD, a CMOS sensor, a

Super CCD as sold by Fuji Photo Film, or any other suitable image sensing device. The CPU 12 controls the processing of the image data based upon program data stored in ROM 14. The CPU 12 may perform all of the image processing or the device 100 may include co-processors 18, in addition to the CPU 12, for performing the image processing operations. The device 100 also includes RAM 16 for data storage. A storage medium 20 is provided for storing the processed image data. The storage medium 20 may be any appropriate memory such as a hard disk, floppy disk, flash memory, or any digital recording medium as is known in the art.

The image data from the image sensor 10 may be supplied to the CPU 12, as shown in Fig. 1. In another arrangement, shown in Fig. 2, the image data may be supplied to a memory 22 from which the CPU 12 reads the image data for processing. A cache 21 may be arranged at any point or at multiple points in the device 100, as shown in Fig. 2. Image data may be stored in any of a number of different formats supported by the digital imaging device 100. Examples of these formats include GIF, JPEG, BMP (Bit Mapped Graphics Format), TIFF, FlashPix, etc. Each of these data formats are well known in the art and do not require description herein.

According to an embodiment of the invention, the CPU 12 divides the image data into segments, as shown in Figs. 3A and 3B. More particularly, the CPU 12 receives the image data for the original image 24 shown in Fig. 3A, and identifies the beginning and ending locations of image segments A1-An, as shown in Fig. 3B. The image segments may or may not be arranged to overlap. In the present example, the CPU 12 and the co-processors 18 perform conventional image processing of the image segments A1-An, such as color interpolation in step S1, white balance in step S2, etc., and conversion of the data to a particular format in step Sn-1 such as the JPEG format. Finally, the image segments are stored on the storage medium 20 in step Sn. The image segments are processed through the image processing pipeline. As the

processed image segments arrive at the storage medium 20, they are stored. The device 100 may also be arranged to perform some image processing before the image is segmented (e.g., excess noise or color separation added to be eliminated on stitching, as discussed below).

5 According to the present invention, the image sensor 10 may output the entire image to the CPU 12 or it may output each line to the CPU 12 in a bucket-brigade manner. For example, the image sensor 10 may be a CCD sensor that operates in a bucket-brigade manner so that the image data is transferred from the sensor 10 one line at a time and is stored in a memory 22.

10 When a line of image data is output from the sensor 10, the line of image data previously stored in memory 22 is shifted out of the memory 22 and supplied to the CPU 12. Usually, the CCD outputs the image data in segments of pixel width or the image is bucket brigaded in pixel width. Therefore, the CCD sensor outputs the image in image segments that are processed as discussed above.

15 The image may be segmented into any appropriate number of segments that facilitates increased image acquisition speed and that the device is equipped to process. In addition, the image may be segmented vertically, horizontally, diagonally, in rectangular sectors, or in other types of physical or logical groupings. For example, the system may scan the image to determine the general orientation of the picture elements and process along the general direction of the elements. As noted above, the segments may overlap with one another. The segmentation of the image may depend upon the length of the image processing stages and the level of organization available for processing.

20 The level of image segmentation may also be determined based upon the amount of time each processing step requires and the overhead of moving each image segment and stitching it with the other image segments. The digital imaging device 100 may be preprogrammed to a particular segmentation level, or the device may be provided with a number of default levels. The default

levels may be selected by the CPU 12 based upon parameters such as resolution, white balance, etc. One of ordinary skill in the art will appreciate that there may be many ways to implement the image segmentation.

An example of the pipeline processing of the image segments is illustrated in Fig. 5. The image data may be supplied to the cache 21, which stores the image data as segments A1, A2, A3 and A4, for example. The cache 21 may store a table that includes the starting and ending locations for each of the data segments of the image data. The image data from the cache 21 is supplied to the image processing pipeline at pipeline stage 1 28. Image processing then begins on the first data segment A1. Data segment A1 is transferred from pipeline stage 1 28 to pipeline stage n 32 to complete image processing of data segment A1. Data segment A1 may then be stored on the storage medium 20. Similar processing occurs for each of the remaining data segments A2, A3 and A4. Data segment A1 may be stored onto the storage medium 20 while image processing continues on other data segments of the image data. Therefore, according to the present invention, image processing may be occurring concurrently with writing to the storage medium 20. The pipeline processing of the data segments increases the processing speed of the digital imaging device 100. More particularly, this pipeline processing of the data segments reduces the time from obtaining the image at the image sensor 10 to the time when the image data is available to begin storing on the storage medium 20.

The image data may also be supplied to a screen 36 or a personal computer (PC) 34, or any other appropriate device. In addition, those of ordinary skill in the art will appreciate that the device 100 may include buffers to facilitate the pipeline processing operation.

According to another aspect of the present invention, some or all of the image processing pipeline stages may be separated to perform parallel processing of the image data segments, as shown in Fig. 6. In this example,

one of the pipeline stages, pipeline stage 3 is separated into parallel pipeline stages 3A 31A and 3B 31B. In this arrangement, different data segments of the image are processed in parallel in stages 3A and 3B. One of ordinary skill in the art will appreciate that any one or a number of the image processing pipeline stages may be separated into a plurality of parallel stages to decrease overall processing time. The device 100 may include buffers to facilitate the processing operation. For example, if a pipeline stage is divided into multiple parallel processing stages, and the device 100 allows processed segments to be output out of order, a buffer may be provided to enable appropriate ordering of the processed data.

Once an image segment has been processed, it is stored on the storage medium 20. Since the writing operation begins as soon as the first image data segment is received at the storage medium 20, the delay in image acquisition due to writing speed is minimized, if not eliminated. When each image segment is stored onto the storage medium 20, it may be stitched to the previously stored image segment. As is well known in the art, stitching includes combining contiguous or overlapping blocks of data to form a complete block of data. The data segments stored on the storage medium 20 may be stitched together to form the entire image. The stitching order may be in many orientations and orders, such as from top to bottom, right to left, bottom to top, left to right. However, stitching is usually done in the order that the data segments are written to the storage medium 20. In addition, the stitching may occur by buffering one data segment, performing the stitching operation for the segment, and then writing the data to the storage medium 20. In another arrangement, the data segments may be written to the storage medium 20 as they arrive, and then stitched in place.

In some cases, the data segments may simply be stored on the storage medium 20 with what amounts to a null stitching operation. For example, some data formats include boundaries for the data, such as 8x8 or 32x32 pixel

boundaries. In these cases, the data segments may be identified along those boundaries. Then, upon storage onto the storage medium 20, each data segment may simply be stored after the previously stored data segment. However, in general, data processing, such as data compression, usually involves interaction or dependency between pixels of the image data. While it may not be necessary to stitch every time a data segment is stored onto the storage medium 20, if the pixels in one data segment are dependent upon pixels in another data segment, then stitching will likely be required.

Stitching may provide an opportunity to modify image data based upon total image data. More particularly, stitching may involve making changes or modifications to other data segments beyond the two data segments that are being stitched together. For example, a particular parameter may be set after analyzing one data segment. It may be determined later that the initial setting for the parameter, based on the single segment, is not appropriate for the entire image. Stitching allows for the possibility of going back and making modifications to the image data.

When the data segments are overlapping, processing occurs using pixels that extend beyond the particular data segment being processed. Once the data segment is processed, any duplicate image data may be discarded. Processing overlapping data segments may improve the overall performance of the imaging device 100 by minimizing the amount of modification required upon stitching. More particularly, initial processing decisions for the data segment may be more accurate since each data segment is processed using information from adjacent image segments providing a better perspective of the image.

In some cases, the resulting image file may require a header or some other information to be added or updated based on the complete image. This may be accomplished by "patching" the image file after all of the image data segments have been written onto the storage medium 20. For example, some

data files include information at the very beginning of the file such as filename, when the file was created, how many bytes are in the file, etc. Some information may not be known until the last data segment is stored onto the storage medium 20, such as the number of bytes. According to the present invention, this information may be added at the end of the storage process, or may be updated every time a new data segment is stored or at some other appropriate time.

Referring to Fig. 7, another embodiment of the invention is shown. According to this embodiment, the image data from the image sensor 10 is stored in memory 38 and the CPU 12 and each of the co-processors 18, for example, read and process different image segments and then store the processed image segments onto the storage medium 20. This arrangement may be more efficient than that shown in Figs. 1 and 2 when there is no specific hardware architecture to support multiple processors performing the pipeline processing of the data segments. The device 100 may be arranged so that a buffer that receives data from the image sensor 10 is used throughout the image pipeline processing operation; that is, the same buffer may be re-used throughout the processing operation.

If, for some reason, processing cannot continue in the device 100 shown in Fig. 7, the pipeline may be stalled until processing can be resumed. For example, if processed data is output out of order, the pipeline may be stalled until the necessary data segments are available for continued processing. Alternatively, buffers may be provided to allow the pipeline to continue processing when data is output out of order. One of ordinary skill in the art will understand that the device 100 may be arranged in any number of architectures to support processing of the image segments.

While particular embodiments of the invention have been shown and described, it is recognized that various modifications thereof will occur to those skilled in the art without departing from the spirit and scope of the invention.

For example, the invention may be implemented using data schema or web pages rather than the directory structure described herein. The described embodiments are to be considered in all respects only as illustrative and not restrictive. Therefore, the scope of the herein-described invention shall be limited solely by the claims appended hereto.

What is claimed is:

1. A method for decreasing image acquisition time in a digital image device, comprising:

- 5 capturing an image;
dividing the image into a plurality of image segments;
performing image processing on each of the plurality of image segments;
and
storing each of the plurality of image segments on the storage medium.

2. The method according to claim 1, wherein the performing step comprises performing image processing on each of the plurality of image segments sequentially.

3. The method according to claim 2, wherein the storing step comprises beginning storage of each of the plurality of image segments as soon as a first one of the plurality of image segments arrives at the storage medium.

4. The method according to claim 3, wherein the performing step and
20 the storing step are performed simultaneously on at least two of the plurality of image segments.

5. The method according to claim 3, wherein the dividing step comprises:

dividing the image into a plurality of image segments that overlap one another.

5

6. The method according to claim 1, further comprising:

stitching the plurality of image segments together to restore the image after the performing step.

006260" 05427960

7. The method according to claim 6, wherein the stitching step comprises:

stitching the plurality of image segments together sequentially following the performing step.

8. The method according to claim 6, wherein the performing step comprises:

performing at least a portion of the image processing in at least two parallel image processing stages.

9. The method according to claim 1, wherein the performing step comprises:

performing at least a portion of the image processing in at least two parallel image processing stages.

10. A computer-readable medium computer-executable instructions for performing the steps comprising:

capturing an image with a digital image device;

dividing the image into a plurality of image segments;

performing image processing on each of the plurality of image segments;

and

storing each of the plurality of image segments on the storage medium.

11. The computer-readable medium according to claim 10, having further computer-executable instructions for performing the performing step comprising performing image processing on each of the plurality of image segments sequentially.

12. The computer-readable medium according to claim 11, having further computer-executable instructions for performing the storing step comprising beginning storage of each of the plurality of image segments as soon as a first one of the plurality of image segments arrives at the storage medium.

13. The computer-readable medium according to claim 12, having further computer-executable instructions for performing the performing step and the storing step simultaneously on different ones of the plurality of image segments.

5

14. The computer-readable medium according to claim 12, having further computer-executable instructions for performing the dividing step comprising:

dividing the image into a plurality of image segments that overlap one another.

15. The computer-readable medium according to claim 10, having further computer-executable instructions comprising:

stitching the plurality of image segments together to restore the image after the performing step.

16. The computer-readable medium according to claim 15, having further computer-executable instructions for performing the stitching step comprising:

stitching the plurality of image segments together sequentially following the performing step.

17. The computer-readable medium according to claim 15, having further computer-executable instructions for performing the performing step comprising:

performing at least a portion of the image processing in at least two
5 parallel image processing stages.

18. The computer-readable medium according to claim 10, having further computer-executable instructions for performing the performing step comprising:

10 performing at least a portion of the image processing in at least two parallel image processing stages.

19. An apparatus for decreasing image acquisition time in a digital image device, comprising:

15 an image sensor that captures an image;
a controller that divides the image into a plurality of image segments and performs image processing of each of the plurality of image segments and outputs processed image segments; and
a storage medium that stores each of the processed image segments.

20

20. The apparatus according to claim 19, wherein the controller is arranged to perform the image processing of the plurality of image segments sequentially.

21. The apparatus according to claim 20, wherein the controller is arranged to store each of the processed data segments as each of the processed data segments arrives at the storage medium.

22. The apparatus according to claim 19, wherein the controller is arranged to stitch the processed image segments together to restore the image.

23. The apparatus according to claim 22, wherein the controller is arranged to perform at least a portion of the image processing in at least two parallel image processing stages.

24. The method according to claim 1, further comprising:
storing image file information on the storage medium, wherein the image file information corresponds to the plurality of image segments for an image stored on the storage medium; and
updating the image file information that has been affected by the image processing performed on any one of the plurality of image segments.

25. The method according to claim 24, further comprising:

modifying at least one of the plurality of image segments stored on the storage medium that has been affected by the image processing performed on subsequent ones of the plurality of image segments stored on the storage medium.

26. The computer-readable medium according to claim 10, further comprising computer-executable instructions for performing the steps of:

storing image file information on the storage medium, wherein the image file information corresponds to the plurality of image segments for an image stored on the storage medium; and

updating the image file information that has been affected by the image processing performed on any one of the plurality of image segments.

27. The computer-readable medium according to claim 26, further comprising computer-executable instructions for performing the step of:

modifying at least one of the plurality of image segments stored on the storage medium that has been affected by the image processing performed on subsequent ones of the plurality of image segments stored on the storage medium.

Abstract of the Invention

5 A method and apparatus for reducing the image acquisition time in a digital imaging device by processing segments of the image through an image processing pipeline and storing the processed image segments. Processing segments of the image allows the digital imaging device to write processed data segments to a storage medium while other image segments are being processed. Any portion of the image processing pipeline may be divided to perform parallel processing on the image segments to increase processing speed.

100

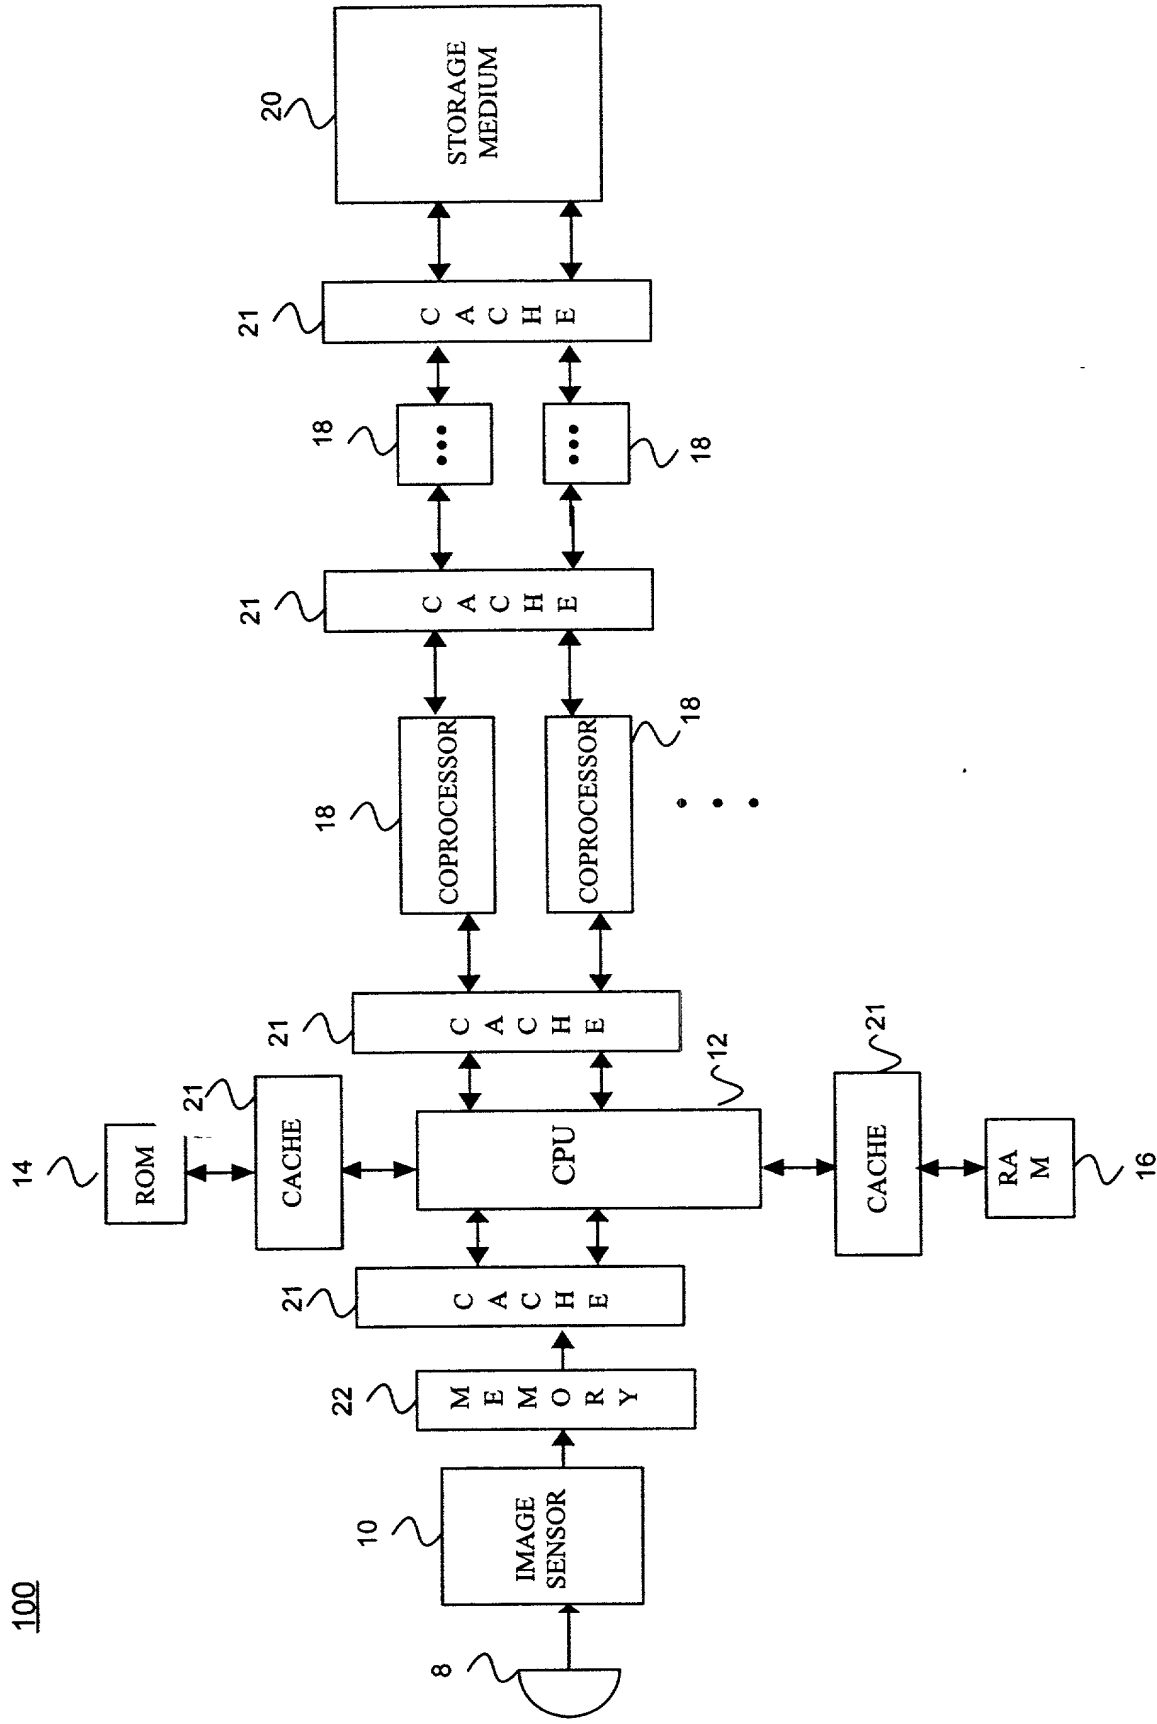


FIG. 2

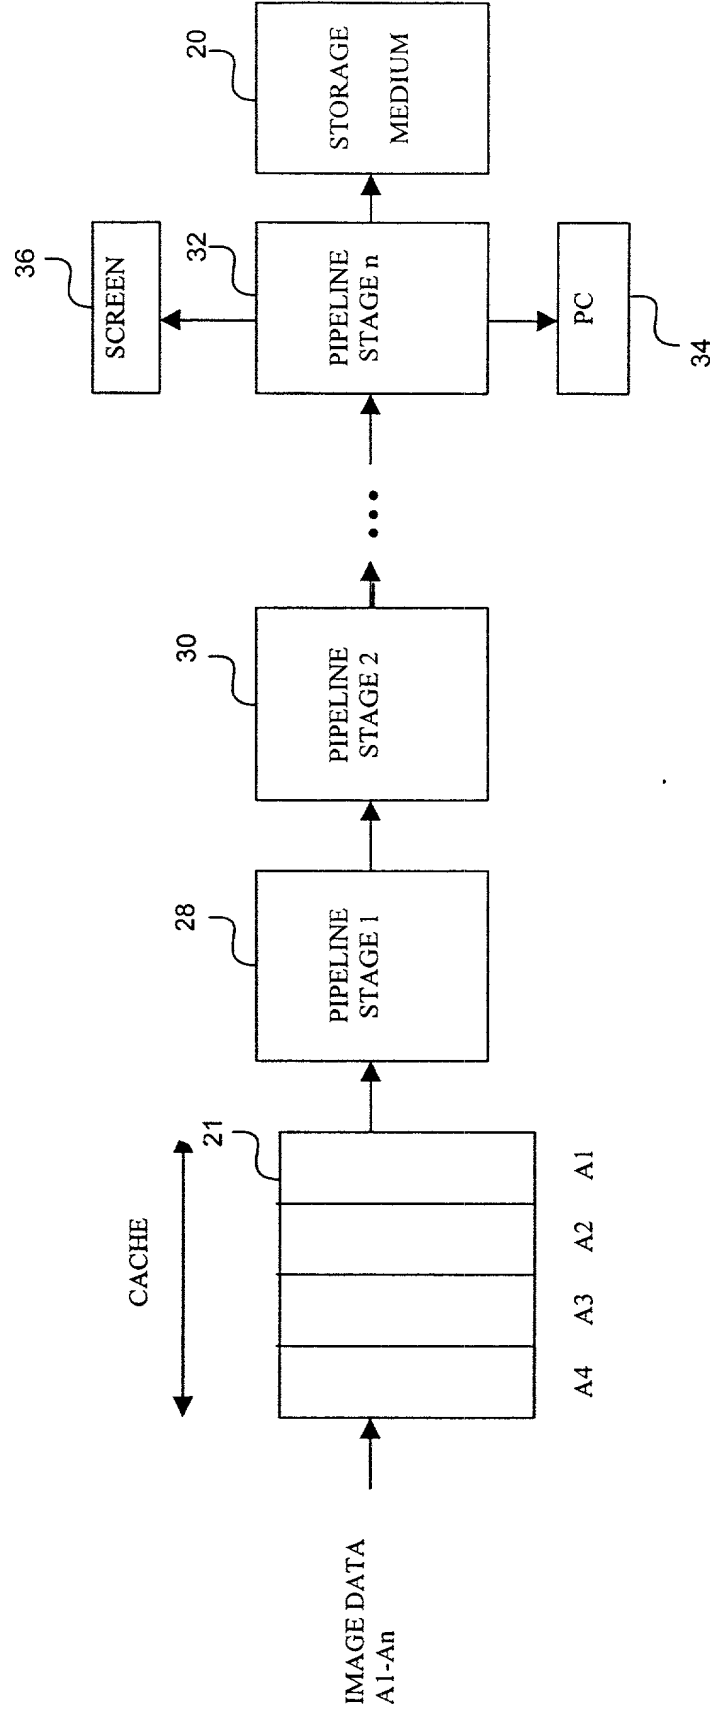


FIG. 5

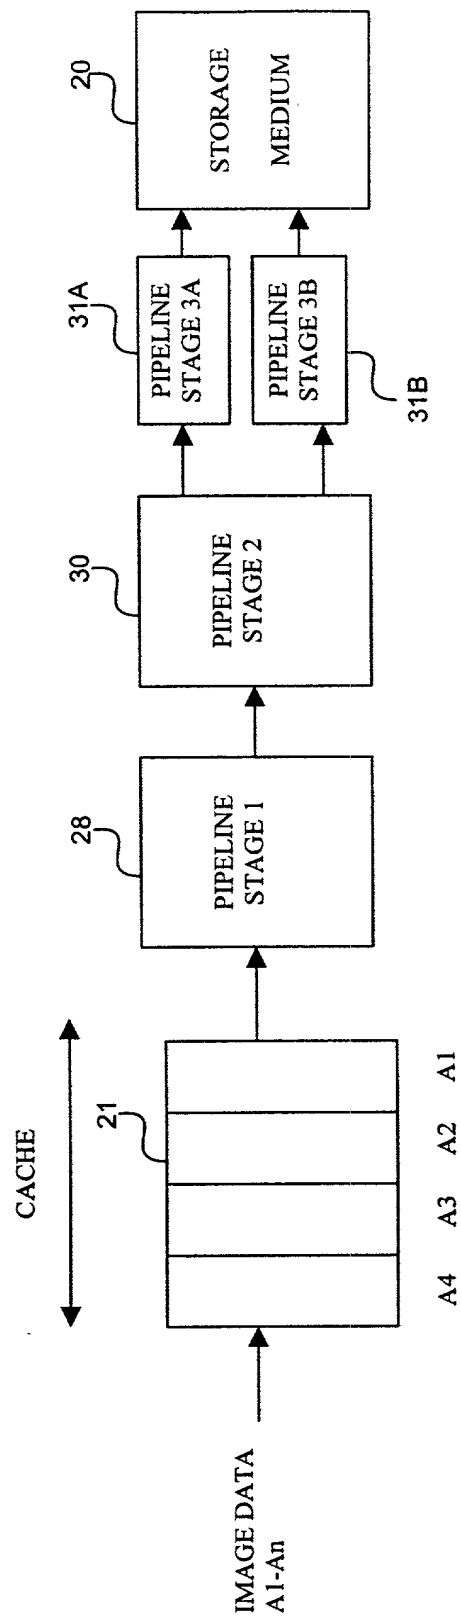


FIG. 6

JOINT DECLARATION FOR PATENT APPLICATION

As the below named inventor, we hereby declare that:

Our residence, post office address and citizenship are as stated below next to our names;

We believe we are the original, first and joint inventors of the subject matter which is claimed and for which a patent is sought on the invention entitled METHOD AND APPARATUS FOR REDUCING IMAGE ACQUISITION TIME IN A DIGITAL IMAGING DEVICE, the specification of which

- ☒ is attached hereto.
☐ was filed on _____ as Application Serial Number _____ and was amended on _____ (if applicable).
☐ was filed under the Patent Cooperation Treaty (PCT) and accorded International Application No. _____, filed _____, and amended on _____ (if any).

We hereby state that we have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

We hereby acknowledge the duty to disclose information which is material to patentability in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

Prior Foreign Application(s)

We hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application(s) for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Country	Application No.	Date of Filing (day month year)	Date of Issue (day month year)	Priority Claimed Under 35 U.S.C. § 119

Prior United States Provisional Application(s)

We hereby claim priority benefits under Title 35, United States Code, § 119(e)(1) of any U.S. provisional application listed below:

U.S. Provisional Application No.	Date of Filing (day month year)	Priority Claimed Under 35 U.S.C. § 119(e)(1)

Prior United States Application(s)

We hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, we acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Application Serial No.	Date of Filing (Day, Month, Year)	Status <input type="checkbox"/> Patented, Pending, Abandoned

Power of Attorney

And we hereby appoint, both jointly and severally, as our attorneys with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith the following at attorneys and agents, their registration numbers being listed after their names:


ALTHERR, Robert F.	31,810	HOSCHEIT, Dale H.	19,090	NIEGOWSKI, James A.	28,331
BANNER, Donald W.	17,037	HYMEL, Lin J.	45,414	PATEL, Binal J.	42,065
BANNER, Mark T.	29,888	IWANICKI, John P.	34,628	PATHAK, Ajay S.	38,266
BANNER, Pamela I.	33,644	JACKSON, Thomas H.	29,808	PAYNE, Stephen S.	35,316
BECKER, Matthew P.	45,824	KAGAN, Sarah A.	32,141	PETERSON, Thomas L.	30,969
BECKETT, William W.	18,262	KATZ, Robert S.	36,402	POTENZA, Joseph M.	28,175
BERGHAMMER, Joseph J.	46,057	KLEIN, William J.	43,719	PRATT, Thomas K.	37,210
BODNER, Jordan	42,338	KRAUSE, Joseph P.	32,578	RENK, Christopher J.	33,761
BUROW, Scott A.	42,373	LINEK, Ernest V.	29,822	RESIS, Robert H.	32,168
CALLAHAN, James V.	20,095	MALONE, Dale A.	32,155	RIVARD, Paul M.	43,446
CHANG, Steve S.	42,402	MANNAVA, Ashok K.	45,301	ROBINSON, Douglas W.	32,751
COHAN, Gregory J.	40,959	MAPLE, Marie-Claire B.	37,588	SCHAD, Steven P.	32,550
COOPERMAN, Marc S.	34,143	MAY, Steven A.	44,912	SHIFLEY, Charles W.	28,042
CURTIN, Joseph P.	34,571	McDERMOTT, Peter D.	29,411	SKERPON, Joseph M.	29,864
DeMOOR, Laura J.	39,654	McKEE, Christopher L.	32,384	STOCKLEY, D. J.	34,257
EVANS, Thomas L.	35,805	McKIE, Edward F.	17,335	VAN ES, J. Pieter	37,746
FEDOROCKO, Gary D.	35,509	MEDLOCK, Nina L.	29,673	WITCOFF, Sheldon W.	17,399
FISHER, Daniel E.	34,162	MEECE, Timothy C.	38,553	WOLFFE, Franklin D.	19,724
FISHER, William J.	32,133	MEEKER, Frederic M.	35,282	WOLFFE, Susan A.	33,568
GLEBOCKI, Christopher R.	38,800	MILLER, Charles L.	43,805	WRIGHT, Bradley C.	38,061
HANLON, Brian E.	40,449	MITRIUS, Janice V.	43,808	SAKO, Katie E.	32,628
HEMMENDINGER, Lisa M.	42,653	MORENO, Christopher P.	38,566	CROUSE, Daniel D.	32,022
HONG, Patricia E.	34,373	NELSON, Jon O.	24,566		

All correspondence and telephone communications should be addressed to:

Pamela I. Banner
Banner & Witcoff, Ltd.
1001 G Street, N.W., 11th Floor
Washington, D.C. 20001-4597

Customer Number: 22907
Tel: (202) 508-9100
Fax: (202) 508-9299

We hereby declare that all statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

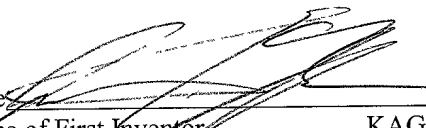Signature  Date 9/25/00
Full Name of First Inventor KAGLE Jonathan C.
Residence Redmond, WA 98052 Family Name First Given Name Second Given Name
Citizenship United States
Post Office Address 14324 NE 84th Court, Redmond, WA 98052

Variable	Mean	SD	Min	Max
Age	38.5	10.5	25	55
Gender	0.5	0.5	0	1
Marital status	0.5	0.5	0	1
Education	12.5	1.5	10	15
Income	15.5	5.5	10	25
Health status	1.5	0.5	1	2
Stress level	2.5	1.5	1	4
Life satisfaction	3.5	1.5	1	5
Work satisfaction	3.5	1.5	1	5
Family satisfaction	3.5	1.5	1	5
Community satisfaction	3.5	1.5	1	5
Overall satisfaction	3.5	1.5	1	5
Life expectancy	75.5	5.5	65	85
Quality of life	4.5	1.5	1	5
Healthcare access	3.5	1.5	1	5
Healthcare quality	3.5	1.5	1	5
Healthcare cost	3.5	1.5	1	5
Healthcare coverage	3.5	1.5	1	5
Healthcare satisfaction	3.5	1.5	1	5
Healthcare utilization	3.5	1.5	1	5
Healthcare expenditure	3.5	1.5	1	5
Healthcare equity	3.5	1.5	1	5
Healthcare efficiency	3.5	1.5	1	5
Healthcare effectiveness	3.5	1.5	1	5
Healthcare safety	3.5	1.5	1	5
Healthcare transparency	3.5	1.5	1	5
Healthcare accountability	3.5	1.5	1	5
Healthcare integrity	3.5	1.5	1	5
Healthcare honesty	3.5	1.5	1	5
Healthcare fairness	3.5	1.5	1	5
Healthcare justice	3.5	1.5	1	5
Healthcare freedom	3.5	1.5	1	5
Healthcare choice	3.5	1.5	1	5
Healthcare control	3.5	1.5	1	5
Healthcare participation	3.5	1.5	1	5
Healthcare partnership	3.5	1.5	1	5
Healthcare collaboration	3.5	1.5	1	5
Healthcare cooperation	3.5	1.5	1	5
Healthcare communication	3.5	1.5	1	5
Healthcare consultation	3.5	1.5	1	5
Healthcare counseling	3.5	1.5	1	5
Healthcare education	3.5	1.5	1	5
Healthcare training	3.5	1.5	1	5
Healthcare development	3.5	1.5	1	5
Healthcare improvement	3.5	1.5	1	5
Healthcare innovation	3.5	1.5	1	5
Healthcare research	3.5	1.5	1	5
Healthcare practice	3.5	1.5	1	5
Healthcare policy	3.5	1.5	1	5
Healthcare law	3.5	1.5	1	5
Healthcare ethics	3.5	1.5	1	5
Healthcare morality	3.5	1.5	1	5
Healthcare values	3.5	1.5	1	5
Healthcare beliefs	3.5	1.5	1	5
Healthcare attitudes	3.5	1.5	1	5
Healthcare behaviors	3.5	1.5	1	5
Healthcare actions	3.5	1.5	1	5
Healthcare decisions	3.5	1.5	1	5
Healthcare plans	3.5	1.5	1	5
Healthcare strategies	3.5	1.5	1	5
Healthcare approaches	3.5	1.5	1	5
Healthcare methods	3.5	1.5	1	5
Healthcare techniques	3.5	1.5	1	5
Healthcare procedures	3.5	1.5	1	5
Healthcare protocols	3.5	1.5	1	5
Healthcare standards	3.5	1.5	1	5
Healthcare guidelines	3.5	1.5	1	5
Healthcare recommendations	3.5	1.5	1	5
Healthcare suggestions	3.5	1.5	1	5
Healthcare advice	3.5	1.5	1	5
Healthcare tips	3.5	1.5	1	5
Healthcare tricks	3.5	1.5	1	5
Healthcare shortcuts	3.5	1.5	1	5
Healthcare hacks	3.5	1.5	1	5
Healthcare workarounds	3.5	1.5	1	5
Healthcare solutions	3.5	1.5	1	5
Healthcare answers	3.5	1.5	1	5
Healthcare responses	3.5	1.5	1	5
Healthcare reactions	3.5	1.5	1	5
Healthcare feelings	3.5	1.5	1	5
Healthcare emotions	3.5	1.5	1	5
Healthcare moods	3.5	1.5	1	5
Healthcare states	3.5	1.5	1	5
Healthcare conditions	3.5	1.5	1	5